

F

E

D

C

B

A

RoHS
Compliant

SYMBOL



REVISION


PPA change to LCP

APPROVAL

G.C.Chen

DATE

16/05/2017

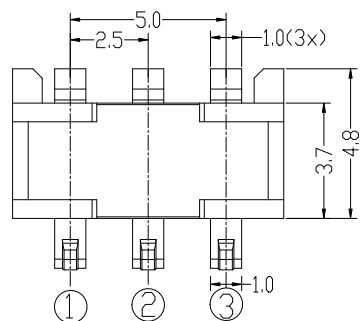

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 20m MAX(INITAL)




1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


1-4.INSULATION RESISTANCE: 100M MIN,

MEASURED BY 500V DC

2. LIFE TEST:MECHANICAL LIFE TEST 30,000 CYCLES.

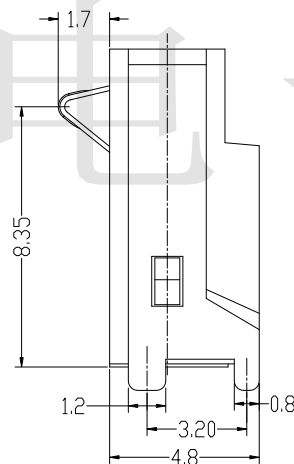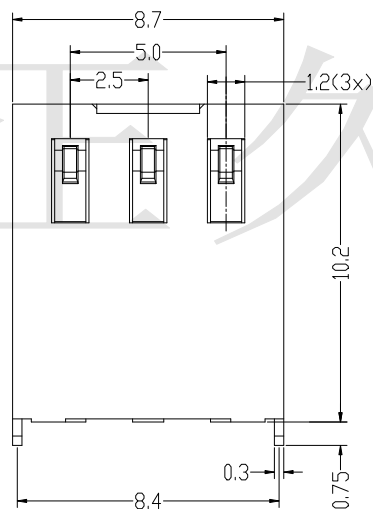

CIRCUIT

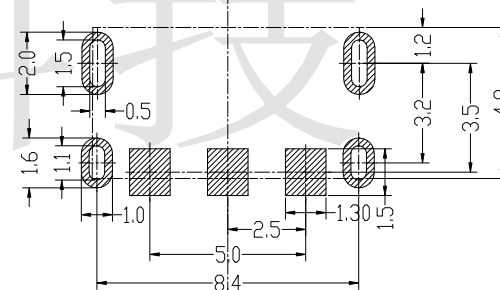

P.C.B. LAYOUT

| | | | | |
|-----|------------------|----------|------|-----------|
| 2 | HOUSING | LCP | 1 | BLACK |
| 1 | CONTACT TERMINAL | BeCu | 3 | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |

深圳市正久电子科技有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| | | | | | | | |
|-----------|--------|-------------------------|------------|----------|-----------|---------|------------|
| PART NAME | | CONNECTOR | | DRAWING | Y,C,ZHANG | DWG.No. | SBICL9 |
| PART NO. | | 立式ZJ-3P-2.5PH-10.2H带固定脚 | | CHECK | G.C.Chen | REV. | A1 |
| | UNIT : | TOLERANCE | UP TO 5 | APPROVAL | SCALE | DATE | 01-07-2016 |
| | mm | OTHERWISE | ABOVE 5~30 | | | ANGLE | PAGE |
| | | | ±0.2 | | | | |
| | | | ±0.3 | | | | |
| | | | ±0.5 | | | | |
| | | | ±3° | | | | |

F

E

D

C

B

A