

REV.	DESCRIPTION	DRAW.	DATE.

NOTE:

1. MATERIAL:

1.1 HOUSING: PA9T, UL 94V-0

1.2 TERMINAL: Phosphor Bronze

2. FINISH:

2.1 TERMINAL: NICKEL 50 μm MIN UNDER PLATED
OVERALL, Au PLATED ON THE CONTACT AREA.
OR Tin ON THE SOLDERING AREA.

3. PRODUCT SPECIFICATION

3.1 CURRENT RATING : 5A

3.2 VOLTAGE RATING : 30V AC

3.3 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC

3.4 INSULATION RESISTANCE: **100MΩ min.**

3.5 CONTACT RESISTANCE: **30mΩ Max.**

3.6 Operating Temperature: **-40° ~105°**

No. of Pins	Dimension		
	DIM A	DIM B	DIM.C
06	12.50	16.50	19.45
07	15.00	19.00	21.95
08	17.50	21.50	24.45
09	20.00	24.00	26.95
10	22.50	26.50	29.45
11	25.00	29.00	31.95




深圳市正久电子科技有限公司

SHENZHEN ZHENGJIU ELECTRONICS CO., LTD

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X.	±0.20
X.x	±0.10
X.xx	±0.05
ANGULAR	±2°

DESIGN	Y.Q.H	DATE	2014.08.26	TITLE:	B01F-A	
APPROVED:		DATE		REV: 01	SCALE: 1:1	UNIT: MM
PART NO		DRAWING NO		SIZE: A4	SHEET: 1/1	

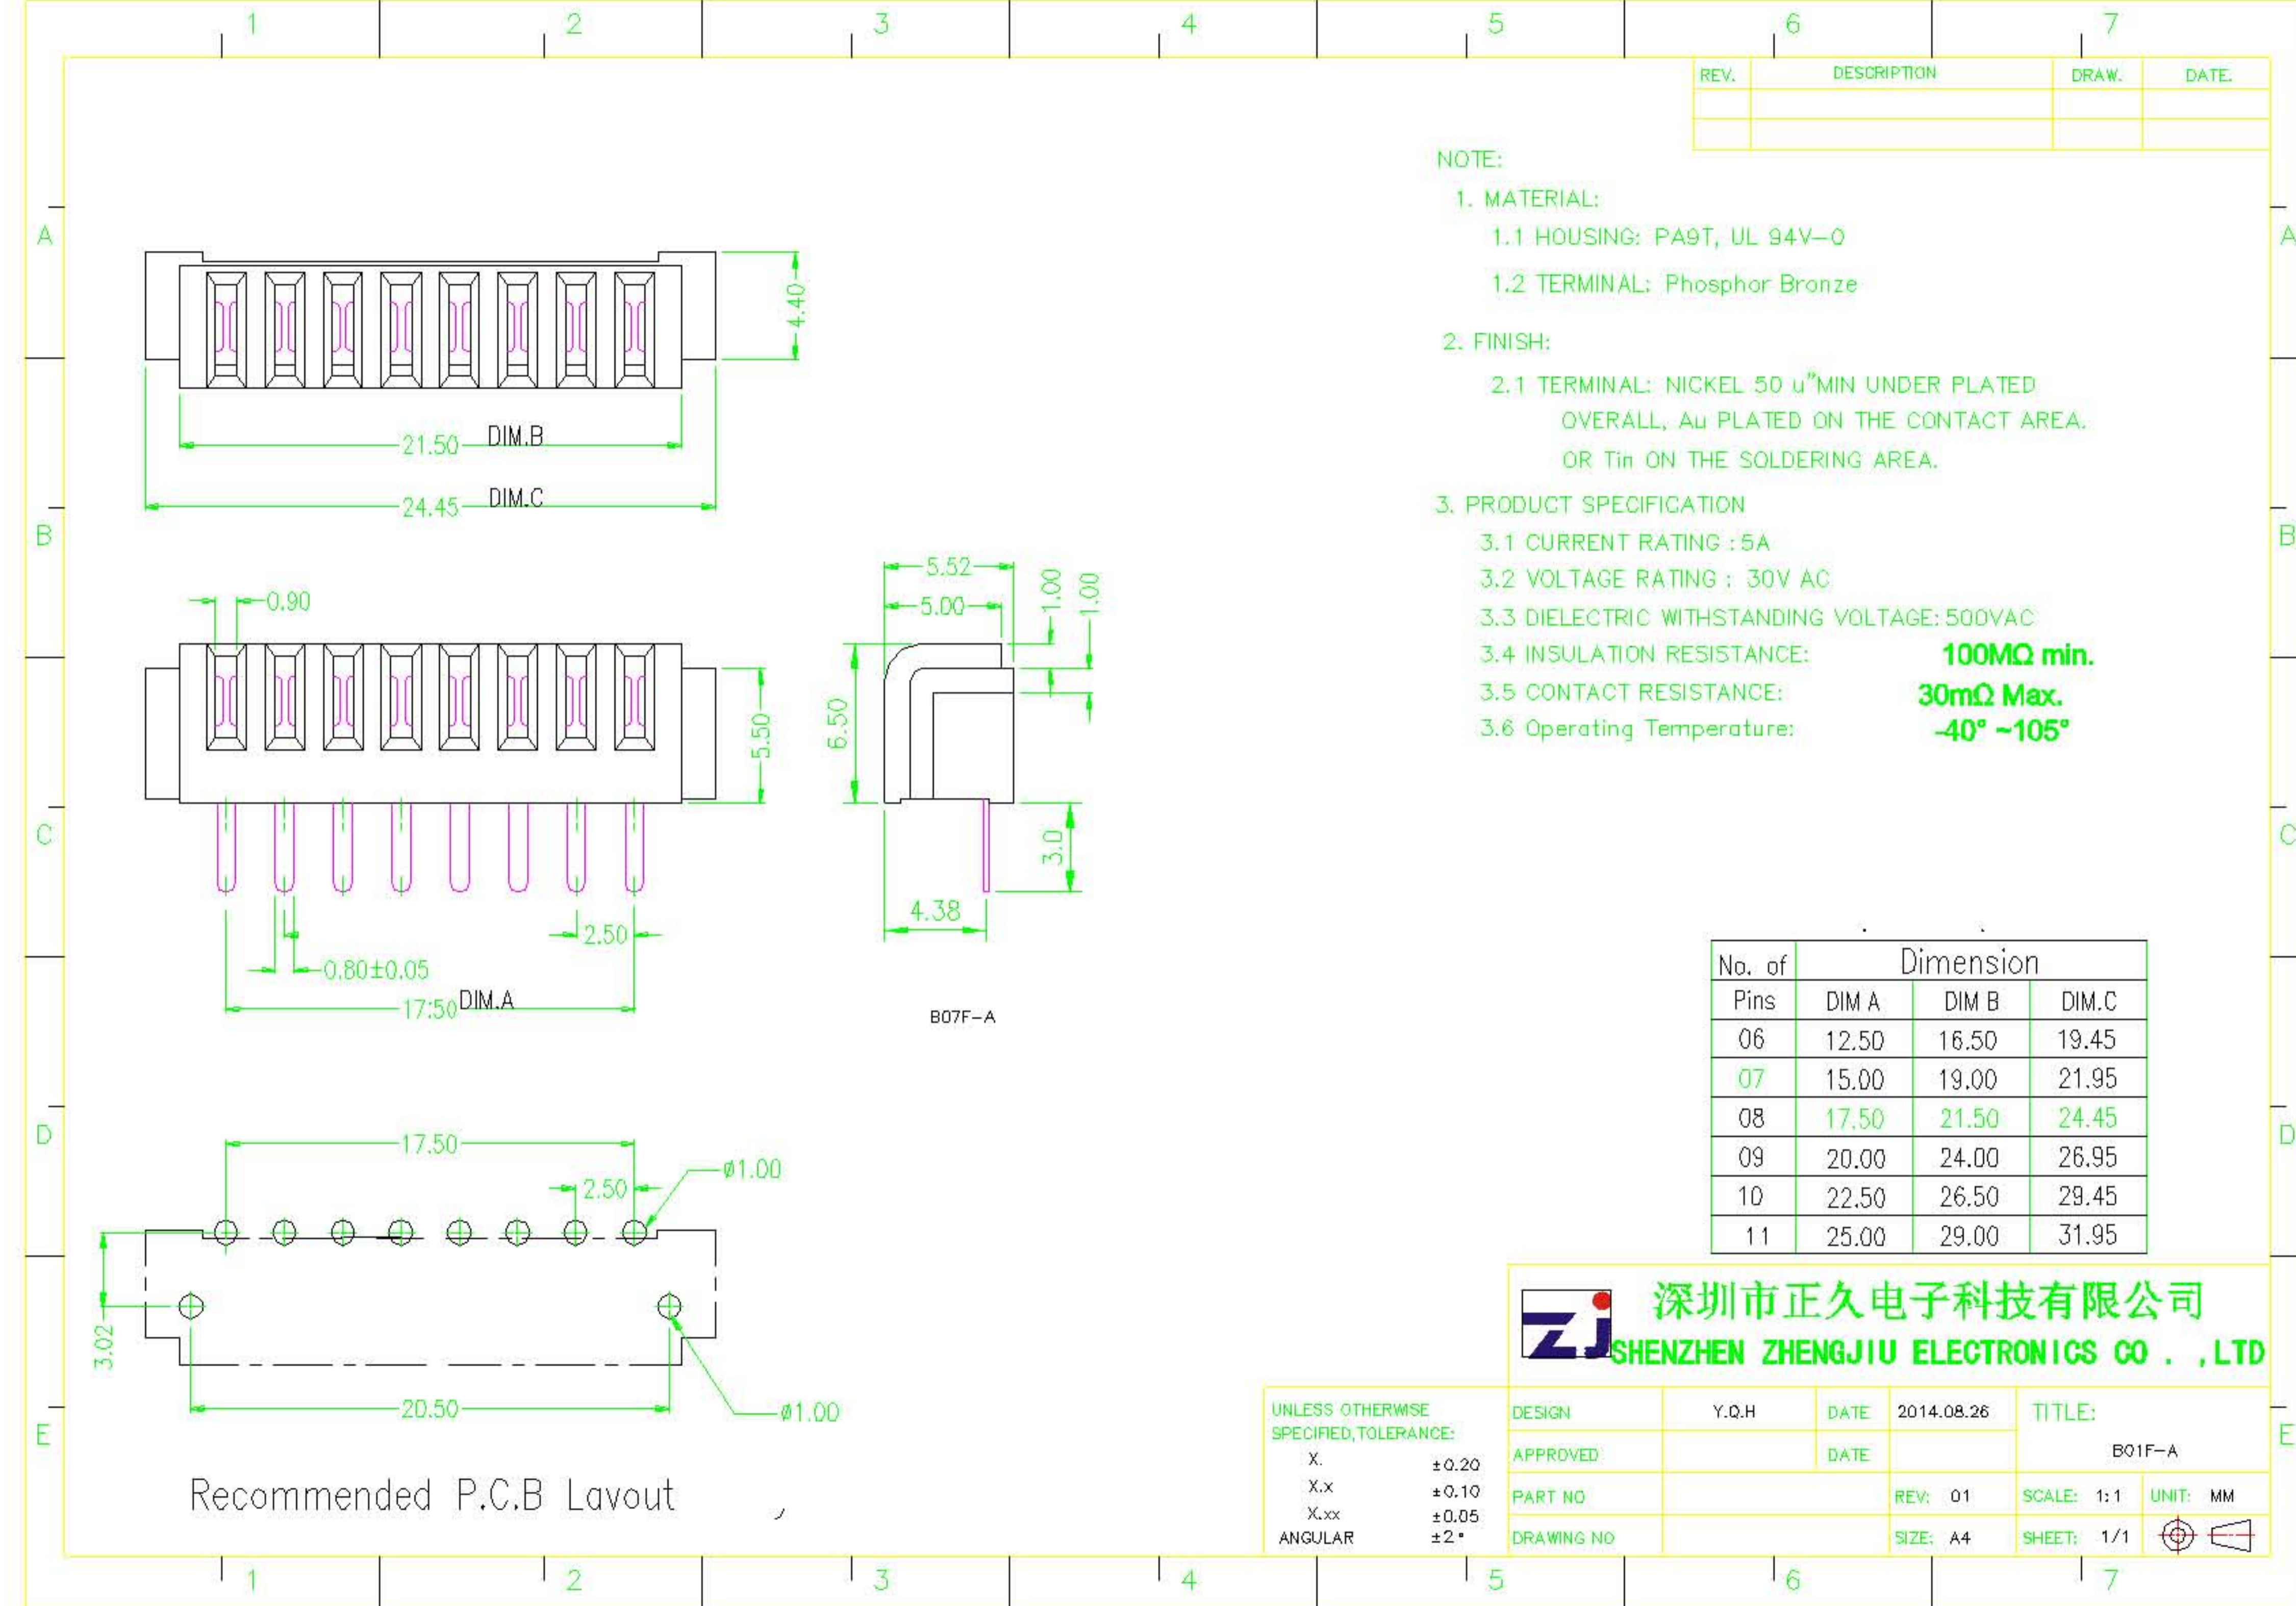

Recommended P.C.B Lavout